

Environmental product declaration

in accordance with ISO 14025 and EN 15804+A2

ABLE



BLÅ STATION

The Norwegian EPD Foundation

Owner of the declaration:

Blå Station AB

Product:

ABLE

Declared unit:

1 pcs

This declaration is based on Product Category Rules:

CEN Standard EN 15804:2012+A2:2019 serves as core PCR
NPCR 026:2022 Part B for Furniture

Program operator:

The Norwegian EPD Foundation

Declaration number:

NEPD-9329-8914

Registration number:

NEPD-9329-8914

Issue date: 07.03.2025

Valid to: 07.03.2030

EPD software:

LCAno EPD generator ID: 602456

General information

Product

ABLE

Program operator:

The Norwegian EPD Foundation
Post Box 5250 Majorstuen, 0303 Oslo, Norway
Phone: +47 977 22 020
web: www.epd-norge.no

Declaration number:

NEPD-9329-8914

This declaration is based on Product Category Rules:

CEN Standard EN 15804:2012+A2:2019 serves as core PCR
NPCR 026:2022 Part B for Furniture

Statement of liability:

The owner of the declaration shall be liable for the underlying information and evidence. EPD Norway shall not be liable with respect to manufacturer information, life cycle assessment data and evidences.

Declared unit:

1 pcs ABLE

Declared unit (cradle to gate) with option:

A1-A3,A4,A5,B2,B3,B4,C1,C2,C3,C4,D

Functional unit:

ABLE is a modern polyfunctional chair and armchair made to comply with all present and future regulations and sustainability requirements, all while "thinking inside the box". ABLE's circularity concept includes the product's entire life cycle, from the initial design phase to a never ending end-of-life. By addressing both current and future requirements, ABLE is: Sustainable, Changeable, Renewable, Durable, Upgradeable, Adaptable, Separable, Repairable, Serviceable, Maintainable, Reusable, Recyclable...
...and more. We think the product is "Loveable".

General information on verification of EPD from EPD tools:

Independent verification of data, other environmental information and the declaration according to ISO 14025:2010, § 8.1.3 and § 8.1.4. Verification of each EPD is made according to EPD-Norway's guidelines for verification and approval requiring that tools are i) integrated into the company's environmental management system, ii) the procedures for use of the EPD tool are approved by EPD-Norway, and iii) the process is reviewed annually by an independent third party verifier. See Appendix G of EPD-Norway's General Programme Instructions for further information on EPD tools

Verification of EPD tool:

Owner of the declaration:

Blå Station AB
Contact person: William Lövdahl
Phone: 044-30 00 348
e-mail: william@blastation.se

Manufacturer:

Blå Station AB

Place of production:

Blå Station AB

, Sweden

Management system:

ISO 9001:2015 - ISO 14001:2015

Organisation no:

556272-1091

Issue date:

07.03.2025

Valid to:

07.03.2030

Year of study:

2023

Comparability:

EPD of construction products may not be comparable if they not comply with EN 15804 and seen in a building context.

Development and verification of EPD:

The declaration is created using EPD tool lca.tools ver EPD2022.03, developed by LCA.no. The EPD tool is integrated in the company's management system, and has been approved by EPD Norway.

Developer of EPD: William Lövdahl

Reviewer of company-specific input data and EPD: Isaac Svensson

Approved:

Håkon Hauan
Managing Director of EPD-Norway

Independent third party verification of the EPD tool, background data and test-EPD in accordance with EPDNorway's procedures and guidelines for verification and approval of EPD tools.

Third party verifier:

Elisabet Amat, GREENIZE projects

(no signature required)

Product

Product description:

Able is a chair and easy chair produced for non-domestic environments. ABLE does not only embody timeless design. It also exemplifies what can be accomplished when prioritizing the integration of circular design principles with high quality and durability in the creation of a truly sustainable product made for the circular economy. The product promotes a transition towards circularity by utilizing a minimal number of different materials that are entirely reusable due to their endless re-loop capabilities.

<https://www.blastation.se/produkter/produktfamiljer/able/able>

Product specification

Materials:

Tubular steel: 22/1,5mm, 20% recycled steel.

Surfaces: Chrome III or powder coated.

Joints, feet and endings: 40% recycled high pressure moulded 100% low carbon zink.

Leather: Naturally tanned leather from Tärnsjö Änggarveri.

Fabric:

Acrylic Canvas 53% recycled and ready for the recyclable loop.

Linnen Canvas: In the recyclable loop

Cotton Canvas: In the recyclable loop.

Materials	kg	%	Recycled share in material (kg)	Recycled share in material (%)
Powder coating	0,10	1,30	0,00	0,00
Metal - Stainless steel	0,19	2,46	0,043	21,83
Metal - Steel	5,59	69,52	1,11	20,00
Metal - Zinc	1,65	20,50	0,99	60,00
Textile - Cotton	0,50	6,21	0,00	0,00
Total	8,048	100,00	2,15	

Packaging	kg	%	Recycled share in material (kg)	Recycled share in material (%)
Packaging	5,20	33,99	3,64	70,00
Packaging - Recycled plastic	0,10	0,65	0,10	100,00
Packaging - Wood	10,00	65,36	0,00	0,00
Total incl. packaging	23,35	100,00	5,89	

Technical data:

Dimensions:

Seat height 40/46 cm

Overall height 76/83 cm

Overall width 55 cm

Overall depth 58 cm

The product is tested and approved according to the following standard:

EN 16139:2013 Furniture - Strength, durability and safety - Requirements for non-domestic seating. Test level 1

Market:

European market

Reference service life, product

The lifetime of the product depends on the application.

Reference service life, building

LCA: Calculation rules

Declared unit:

1 pcs ABLE

Cut-off criteria:

All major raw materials and all the essential energy is included. The production processes for raw materials and energy flows with very small amounts (less than 1%) are not included. These cut-off criteria do not apply for hazardous materials and substances.

Allocation:

The allocation is made in accordance with the provisions of EN 15804. Incoming energy and water and waste production in-house is allocated equally among all products through mass allocation. Effects of primary production of recycled materials is allocated to the main product in which the material was used. The recycling process and transportation of the material is allocated to this analysis.

Data quality:

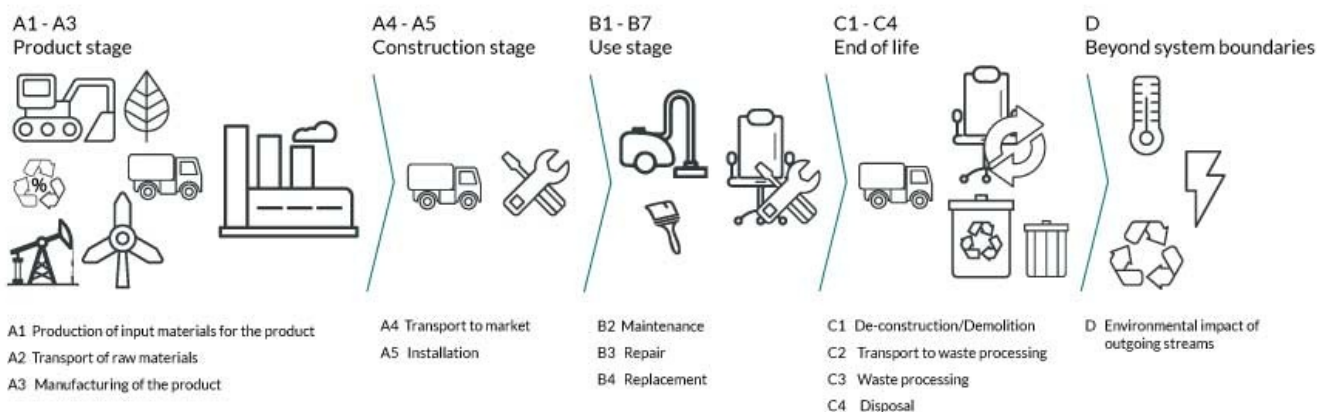
Specific data for the product composition are provided by the manufacturer. They represent the production of the declared product and were collected for EPD development in the year of study. Background data is based on registered EPDs according to EN 15804, Ostfold Research databases, ecoinvent and other LCA databases. The data quality of the raw materials in A1 is presented in the table below.

Materials	Source	Data quality	Year
Metal - Stainless steel	ecoinvent 3.6	Database	2019
Metal - Steel	ecoinvent 3.6	Database	2019
Metal - Zinc	Modified ecoinvent 3.6	Database	2019
Packaging	ecoinvent 3.6	Database	2019
Packaging - Recycled plastic	ecoinvent 3.6	Database	2019
Packaging - Wood	Modified ecoinvent 3.6	Database	2019
Powder coating	ecoinvent 3.6	Database	2019
Textile - Cotton	ecoinvent 3.6	Database	2019

System boundaries (X=included, MND=module not declared, MNR=module not relevant)

Product stage			Construction installation stage		Use stage						End of life stage				Beyond the system boundaries	
Raw materials	Transport	Manufacturing	Transport	Assembly	Use	Maintenance	Repair	Replacement	Refurbishment	Operational energy use	Operational water use	De-construction demolition	Transport	Waste processing	Disposal	Reuse-Recovery-Recycling-potential
A1	A2	A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D
X	X	X	X	X	MND	X	X	X	MND	MND	MND	X	X	X	X	X

System boundary:



Additional technical information:

Maintenance and service guides:

For maintenance and service guides, please visit our website at: <https://www.blastation.com/downloads/care-instructions>

Blå Station offers solutions for renovations and recycling based on customer's preferences, product, condition, quantity and region. Please contact Blå Station for more information.

LCA: Scenarios and additional technical information

The following information describe the scenarios in the different modules of the EPD.

Absence of data for user and end of life stage:

B1: User stage is fully dependent on application and environment of the product.

B3-B5: Reparation, replacement and refurbishment of the product is dependent on non-domestic usage. Reparation, replacement , and refurbishment are possible, please contact Blå Station for further information for possible solutions.














B6-B7: ABLE does not require energy nor water for operational usage.














C1: No special tools are needed for De-construction or demolition of ingoing materials.

Transport from production place to user (A4)	Capacity utilisation (incl. return) %	Distance (km)	Fuel/Energy Consumption	Unit	Value (Liter/tonne)
Truck, 16-32 tonnes, EURO 6 (km)	36,7 %	500	0,043	l/tkm	21,50
Assembly (A5)					
Unit	Value				
Waste, packaging, pallet, EUR wooden pallet, reusable, average treatment (kg)	kg	10,00			
Waste, Packaging cardboard, corrugated, 70 % recycled, to average treatment (kg)	kg	5,20			
Waste, packaging, plastic film (LDPE), to average treatment - A5 (kg)	kg	0,10			
Maintenance (B2)					
Unit	Value				
Water, tap water (kg)	kg	0,50			
Transport to waste processing (C2)					
Capacity utilisation (incl. return) %	Distance (km)	Fuel/Energy Consumption	Unit	Value (Liter/tonne)	
Truck, 16-32 tonnes, EURO 6 (km)	36,7 %	30	0,043	l/tkm	1,29
Waste processing (C3)					
Unit	Value				
Waste, materials to recycling (kg)	kg	2,52			
Waste treatment per kg Scrap steel, incineration with fly ash extraction (kg)	kg	5,79			
Waste treatment per kg Non-hazardous waste, incineration with fly ash extraction - C3 (kg)	kg	0,10			
Waste treatment per kg Textile, incineration with fly ash extraction (kg)	kg	0,50			
Waste treatment per kg Scrap zinc, incineration with fly ash extraction (kg)	kg	1,65			
Disposal (C4)					
Unit	Value				
Landfilling of ashes and residues from incineration of Scrap steel (kg)	kg	3,82			
Landfilling of ashes and residues from incineration of Scrap zinc (kg)	kg	1,090			
Landfilling of ashes from incineration of Textile, soiled, process per kg ashes and residues (kg)	kg	0,025			
Landfilling of ashes from incineration of Non-hazardous waste, process per kg ashes and residues - C4 (kg)	kg	0,024			
Benefits and loads beyond the system boundaries (D)					
Unit	Value				
Substitution of thermal energy, district heating (MJ)	MJ	7,79			
Substitution of primary zinc with net scrap (kg)	kg	0,33			
Substitution of primary steel with net scrap (kg)	kg	1,57			
Substitution of electricity (MJ)	MJ	0,51			

LCA: Results

The LCA results are presented below for the declared unit defined on page 2 of the EPD document.

Environmental impact							
Indicator	Unit	A1-A3	A4	A5	B2	B3	
 GWP-total	kg CO ₂ -eq	1,24E+01	6,42E-01	5,27E+00	1,73E-04	0	
 GWP-fossil	kg CO ₂ -eq	3,61E+01	6,41E-01	1,05E-01	1,72E-04	0	
 GWP-biogenic	kg CO ₂ -eq	-2,42E+01	2,65E-04	2,91E-01	1,08E-06	0	
 GWP-luluc	kg CO ₂ -eq	5,45E-01	2,28E-04	3,19E-05	2,79E-07	0	
 ODP	kg CFC11 -eq	2,92E-06	1,45E-07	2,04E-08	1,50E-11	0	
 AP	mol H+ -eq	2,65E-01	1,84E-03	5,16E-04	1,00E-06	0	
 EP-FreshWater	kg P -eq	5,02E-03	5,12E-06	8,68E-07	1,37E-08	0	
 EP-Marine	kg N -eq	1,49E-01	3,65E-04	1,87E-04	1,59E-07	0	
 EP-Terrestrial	mol N -eq	6,42E-01	4,08E-03	1,96E-03	1,85E-06	0	
 POCP	kg NMVOC -eq	1,55E-01	1,56E-03	5,49E-04	5,81E-07	0	
 ADP-minerals&metals ¹	kg Sb-eq	1,29E-01	1,77E-05	2,31E-06	4,80E-09	0	
 ADP-fossil ¹	MJ	4,69E+02	9,69E+00	1,37E+00	2,93E-03	0	
 WDP ¹	m ³	3,54E+03	9,38E+00	1,85E+00	5,22E-02	0	

Indicator	Unit	B4	C1	C2	C3	C4	D
 GWP-total	kg CO ₂ -eq	0	0	3,85E-02	1,82E+00	5,29E-02	-2,80E+00
 GWP-fossil	kg CO ₂ -eq	0	0	3,85E-02	2,87E-01	5,28E-02	-2,78E+00
 GWP-biogenic	kg CO ₂ -eq	0	0	1,59E-05	1,53E+00	4,32E-05	-1,08E-02
 GWP-luluc	kg CO ₂ -eq	0	0	1,37E-05	1,52E-05	1,63E-05	-5,70E-03
 ODP	kg CFC11 -eq	0	0	8,71E-09	5,47E-09	1,69E-08	-3,29E-03
 AP	mol H+ -eq	0	0	1,11E-04	3,69E-04	3,83E-04	-1,89E-02
 EP-FreshWater	kg P -eq	0	0	3,07E-07	1,43E-06	5,18E-07	-2,26E-04
 EP-Marine	kg N -eq	0	0	2,19E-05	1,46E-04	1,37E-04	-4,10E-03
 EP-Terrestrial	mol N -eq	0	0	2,45E-04	1,57E-03	1,52E-03	-4,42E-02
 POCP	kg NMVOC -eq	0	0	9,37E-05	4,50E-04	4,36E-04	-1,52E-02
 ADP-minerals&metals ¹	kg Sb-eq	0	0	1,06E-06	3,26E-07	9,43E-07	-2,60E-02
 ADP-fossil ¹	MJ	0	0	5,82E-01	4,47E-01	1,24E+00	-3,01E+01
 WDP ¹	m ³	0	0	5,63E-01	2,84E-01	2,26E+00	4,36E+01







GWP-total = Global Warming Potential total; GWP-fossil = Global Warming Potential fossil fuels; GWP-biogenic = Global Warming Potential biogenic; GWP-luluc = Global Warming Potential land use and land use change; ODP = Depletion potential of the stratospheric ozone layer; AP = Acidification potential, Accumulated Exceedance; EP-freshwater = Eutrophication potential, fraction of nutrients reaching freshwater end compartment; EP-marine = Eutrophication potential, fraction of nutrients reaching marine end compartment; EP-terrestrial = Eutrophication potential, Accumulated Exceedance; POCP = Formation potential of tropospheric ozone; ADP-minerals&metals = Abiotic depletion potential for non-fossil resources; ADP-fossil = Abiotic depletion for fossil resources potential; WDP = Water (user) deprivation potential, deprivation-weighted water consumption







"Reading example: 9,0 E-03 = 9,0*10⁻³ = 0,009"
 *INA Indicator Not Assessed

1. The results of this environmental impact indicator shall be used with care as the uncertainties on these results are high or as there is limited experienced with the indicator

Remarks to environmental impacts

Additional environmental impact indicators

Indicator	Unit	A1-A3	A4	A5	B2	B3
 PM	Disease incidence	2,73E-06	3,93E-08	7,37E-09	9,00E-12	0
 IRP ²	kgBq U235 -eq	2,52E+00	4,24E-02	5,76E-03	2,03E-05	0
 ETP-fw ¹	CTUe	1,82E+03	7,19E+00	1,78E+00	3,17E-03	0
 HTP-c ¹	CTUh	1,79E-07	0,00E+00	6,80E-11	1,00E-12	0
 HTP-nc ¹	CTUh	1,94E-06	7,85E-09	2,96E-09	1,10E-11	0
 SQP ¹	dimensionless	1,22E+03	6,78E+00	9,35E-01	8,19E-04	0



Indicator	Unit	B4	C1	C2	C3	C4	D
 PM	Disease incidence	0	0	2,36E-09	1,39E-08	7,06E-09	-2,06E-07
 IRP ²	kgBq U235 -eq	0	0	2,54E-03	1,30E-03	4,96E-03	-1,08E-01
 ETP-fw ¹	CTUe	0	0	4,31E-01	3,59E+00	7,06E-01	-1,52E+02
 HTP-c ¹	CTUh	0	0	0,00E+00	3,87E-10	2,40E-11	-1,42E-08
 HTP-nc ¹	CTUh	0	0	4,71E-10	3,01E-09	6,35E-10	9,03E-09
 SQP ¹	dimensionless	0	0	4,07E-01	1,05E-01	2,69E+00	-1,24E+01











PM = Particulate Matter emissions; IRP = Ionizing radiation – human health; ETP-fw = Eco toxicity – freshwater; HTP-c = Human toxicity – cancer effects; HTP-nc = Human toxicity – non cancer effects; SQP = Soil Quality (dimensionless)

"Reading example: 9,0 E-03 = 9,0*10⁻³ = 0,009"

*INA Indicator Not Assessed

1. The results of this environmental impact indicator shall be used with care as the uncertainties on these results are high or as there is limited experienced with the indicator
2. This impact category deals mainly with the eventual impact of low dose ionizing radiation on human health of the nuclear fuel cycle. It does not consider effects due to possible nuclear accidents, occupational exposure nor due to radioactive waste disposal in underground facilities. Potential ionizing radiation from the soil, from radon and from some construction materials is also not measured by this indicator.




Resource use								
Indicator		Unit	A1-A3	A4	A5	B2	B3	
	PERE	MJ	1,69E+02	1,39E-01	2,34E-02	3,98E-04	0	
	PERM	MJ	2,03E+02	0,00E+00	-1,93E+02	0,00E+00	0	
	PERT	MJ	3,71E+02	1,39E-01	-1,93E+02	3,98E-04	0	
	PENRE	MJ	4,70E+02	9,69E+00	1,37E+00	2,93E-03	0	
	PENRM	MJ	4,25E+00	0,00E+00	-4,25E+00	0,00E+00	0	
	PENRT	MJ	4,75E+02	9,69E+00	-2,88E+00	2,93E-03	0	
	SM	kg	5,89E+00	0,00E+00	0,00E+00	0,00E+00	0	
	RSF	MJ	1,47E+00	4,96E-03	7,59E-04	3,19E-05	0	
	NRSF	MJ	1,39E-01	1,78E-02	3,78E-03	3,15E-05	0	
	FW	m ³	3,67E+00	1,04E-03	6,88E-04	5,03E-04	0	




Indicator		Unit	B4	C1	C2	C3	C4	D
	PERE	MJ	0	0	8,33E-03	2,35E-02	2,22E-02	-7,17E+00
	PERM	MJ	0	0	0,00E+00	-9,00E+00	0,00E+00	0,00E+00
	PERT	MJ	0	0	8,33E-03	-8,98E+00	2,22E-02	-7,17E+00
	PENRE	MJ	0	0	5,82E-01	4,66E-01	1,24E+00	-3,01E+01
	PENRM	MJ	0	0	0,00E+00	0,00E+00	0,00E+00	0,00E+00
	PENRT	MJ	0	0	5,82E-01	4,66E-01	1,24E+00	-3,01E+01
	SM	kg	0	0	0,00E+00	0,00E+00	0,00E+00	0,00E+00
	RSF	MJ	0	0	2,98E-04	4,82E-04	5,90E-04	7,18E-03
	NRSF	MJ	0	0	1,07E-03	0,00E+00	2,80E-02	1,53E+00
	FW	m ³	0	0	6,22E-05	5,46E-04	1,12E-03	-4,02E-02

PERE = Use of renewable primary energy excluding renewable primary energy resources used as raw materials; PERM = Use of renewable primary energy resources used as raw materials; PERT = Total use of renewable primary energy resources; PENRE = Use of non renewable primary energy excluding non-renewable primary energy resources used as raw materials; PENRM = Use of non renewable primary energy resources used as raw materials; PENRT = Total use of non renewable primary energy resources; SM = Use of secondary materials; RSF = Use of renewable secondary fuels; NRSF = Use of non-renewable secondary fuels; FW = Net use of fresh water

"Reading example: 9,0 E-03 = 9,0*10⁻³ = 0,009"

*INA Indicator Not Assessed






End of life - Waste								
Indicator		Unit	A1-A3	A4	A5	B2	B3	
	HWD	kg	2,47E-01	5,00E-04	0,00E+00	5,54E-07	0	
	NHWD	kg	9,95E+00	4,71E-01	5,80E+00	3,56E-05	0	
	RWD	kg	2,00E-03	6,60E-05	0,00E+00	1,72E-08	0	






Indicator		Unit	B4	C1	C2	C3	C4	D
	HWD	kg	0	0	3,00E-05	0,00E+00	4,91E+00	-2,28E-02
	NHWD	kg	0	0	2,83E-02	1,05E-01	3,14E-02	-8,67E-01
	RWD	kg	0	0	3,96E-06	0,00E+00	7,68E-06	-7,65E-05

HWD = Hazardous waste disposed; NHWD = Non-hazardous waste disposed; RWD = Radioactive waste disposed

"Reading example: 9,0 E-03 = 9,0*10⁻³ = 0,009"

*INA Indicator Not Assessed

End of life - Output flow								
Indicator		Unit	A1-A3	A4	A5	B2	B3	
	CRU	kg	0,00E+00	0,00E+00	9,50E+00	0,00E+00	0	
	MFR	kg	0,00E+00	0,00E+00	4,89E+00	0,00E+00	0	
	MER	kg	1,30E-02	0,00E+00	8,59E-01	0,00E+00	0	
	EEE	MJ	7,74E-03	0,00E+00	6,42E-01	0,00E+00	0	
	EET	MJ	1,17E-01	0,00E+00	9,72E+00	0,00E+00	0	

Indicator		Unit	B4	C1	C2	C3	C4	D
	CRU	kg	0	0	0,00E+00	0,00E+00	0,00E+00	0,00E+00
	MFR	kg	0	0	0,00E+00	2,53E+00	0,00E+00	0,00E+00
	MER	kg	0	0	0,00E+00	8,05E+00	0,00E+00	0,00E+00
	EEE	MJ	0	0	0,00E+00	5,54E-01	0,00E+00	0,00E+00
	EET	MJ	0	0	0,00E+00	8,38E+00	0,00E+00	0,00E+00

CRU = Components for re-use; MFR = Materials for recycling; MER = Materials for energy recovery; EEE = Exported energy electrical; EET = Exported energy thermal

"Reading example: 9,0 E-03 = 9,0*10⁻³ = 0,009"

*INA Indicator Not Assessed

Biogenic Carbon Content		
Indicator	Unit	At the factory gate
Biogenic carbon content in product	kg C	2,25E-01
Biogenic carbon content in accompanying packaging	kg C	6,54E+00

Note: 1 kg biogenic carbon is equivalent to 44/12 kg CO₂

Additional requirements

Greenhouse gas emissions from the use of electricity in the manufacturing phase

National production mix from import, low voltage (production of transmission lines, in addition to direct emissions and losses in grid) of applied electricity for the manufacturing process (A3).

Electricity mix	Source	Amount	Unit
Electricity, European average (kWh)	ecoinvent 3.6	428,03	g CO ₂ -eq/kWh
Electricity, Sweden (kWh)	ecoinvent 3.6	54,94	g CO ₂ -eq/kWh

Dangerous substances

The product contains no substances given by the REACH Candidate list.

Indoor environment

ABLE is certified via Greenguard Gold. Products that have achieved GREENGUARD Gold Certification are scientifically proven to meet some of the world's most rigorous third-party chemical emissions standards, helping to reduce indoor air pollution and the risk of chemical exposure. This certificate proves that ABLE can be used for environments with very strict standards for emission releases, such as schools and healthcare facilities.

Additional Environmental Information

Key Environmental Indicators

Key environmental indicators	Unit	A1-A3	A4	A1-C4	A1-D
GWPTotal	kg CO ₂ -eq	12,40	0,64	20,22	17,42
Total energy consumption	MJ	640,69	9,86	654,32	618,55
Amount of recycled materials	%	25,24			

Additional environmental impact indicators required in NPCR Part A for construction products

Indicator	Unit	A1-A3	A4	A5	B2	B3
GWPIOBC	kg CO ₂ -eq	3,58E+01	6,42E-01	3,73E+00	1,73E-04	0

Indicator	Unit	B4	C1	C2	C3	C4	D
GWPIOBC	kg CO ₂ -eq	0	0	3,85E-02	9,91E-01	5,46E-02	-3,65E+00

GWPI-IOBC: Global warming potential calculated according to the principle of instantaneous oxidation. In order to increase the transparency of biogenic carbon contribution to climate impact, the indicator GWP-IOBC is required as it declares climate impacts calculated according to the principle of instantaneous oxidation. GWP-IOBC is also referred to as GWP-GHG in context to Swedish public procurement legislation.

Variants and Options






Key environmental indicators (A1-A3) for variants of this EPD

Variants	Weight (kg)	GWPTotal (kg CO ₂ -eq)	Total energy consumption (MJ)	Amount of recycled materials (%)
ABLE armrest in walnut	7,55	9,59	651,94	24,87
ABLE armrest in ash	7,55	9,57	651,75	24,87
ABLE armrest in beech	7,55	9,59	650,65	24,87
ABLE armrest in oak	7,55	9,57	651,90	24,87

Bibliography

ISO 14025:2010 Environmental labels and declarations - Type III environmental declarations - Principles and procedures.
 ISO 14044:2006 Environmental management - Life cycle assessment - Requirements and guidelines.
 EN 15804:2012+A2:2019 Environmental product declaration - Core rules for the product category of construction products.
 ISO 21930:2017 Sustainability in buildings and civil engineering works - Core rules for environmental product declarations of construction products.
 ecoinvent v3, Allocation, cut-off by classification, Swiss Centre of Life Cycle Inventories.
 Iversen et al., (2021) eEPD v2021.09 Background information for EPD generator tool system verification, LCA.no Report number: 07.21
 Ruud et al., (2023) EPD generator for NPCR026 Part B for Furniture - Background information for EPD generator application and LCA data, LCA.no report number 01.23
 NPCR Part A: Construction products and services. Ver. 2.0. March 2021, EPD-Norge.
 NPCR 026 Part B for Furniture. Ver. 2.0 March 2022, EPD-Norge.

Emissions:
 GREENGUARD GOLD
 BLA STATION AB
 ABLE

 Global program operator	Program operator and publisher The Norwegian EPD Foundation Post Box 5250 Majorstuen, 0303 Oslo, Norway	Phone: +47 977 22 020 e-mail: post@epd-norge.no web: www.epd-norge.no
	Owner of the declaration: Blå Station AB , , Sweden	Phone: 044-30 00 348 e-mail: william@blastation.se web: https://www.blastation.com/
	Author of the Life Cycle Assessment LCA.no AS Dokka 6A, 1671 Kråkerøy, Norway	Phone: +47 916 50 916 e-mail: post@lca.no web: www.lca.no
	Developer of EPD generator LCA.no AS Dokka 6A, 1671 Kråkerøy, Norway	Phone: +47 916 50 916 e-mail: post@lca.no web: www.lca.no
	ECO Platform ECO Portal	web: www.eco-platform.org web: ECO Portal